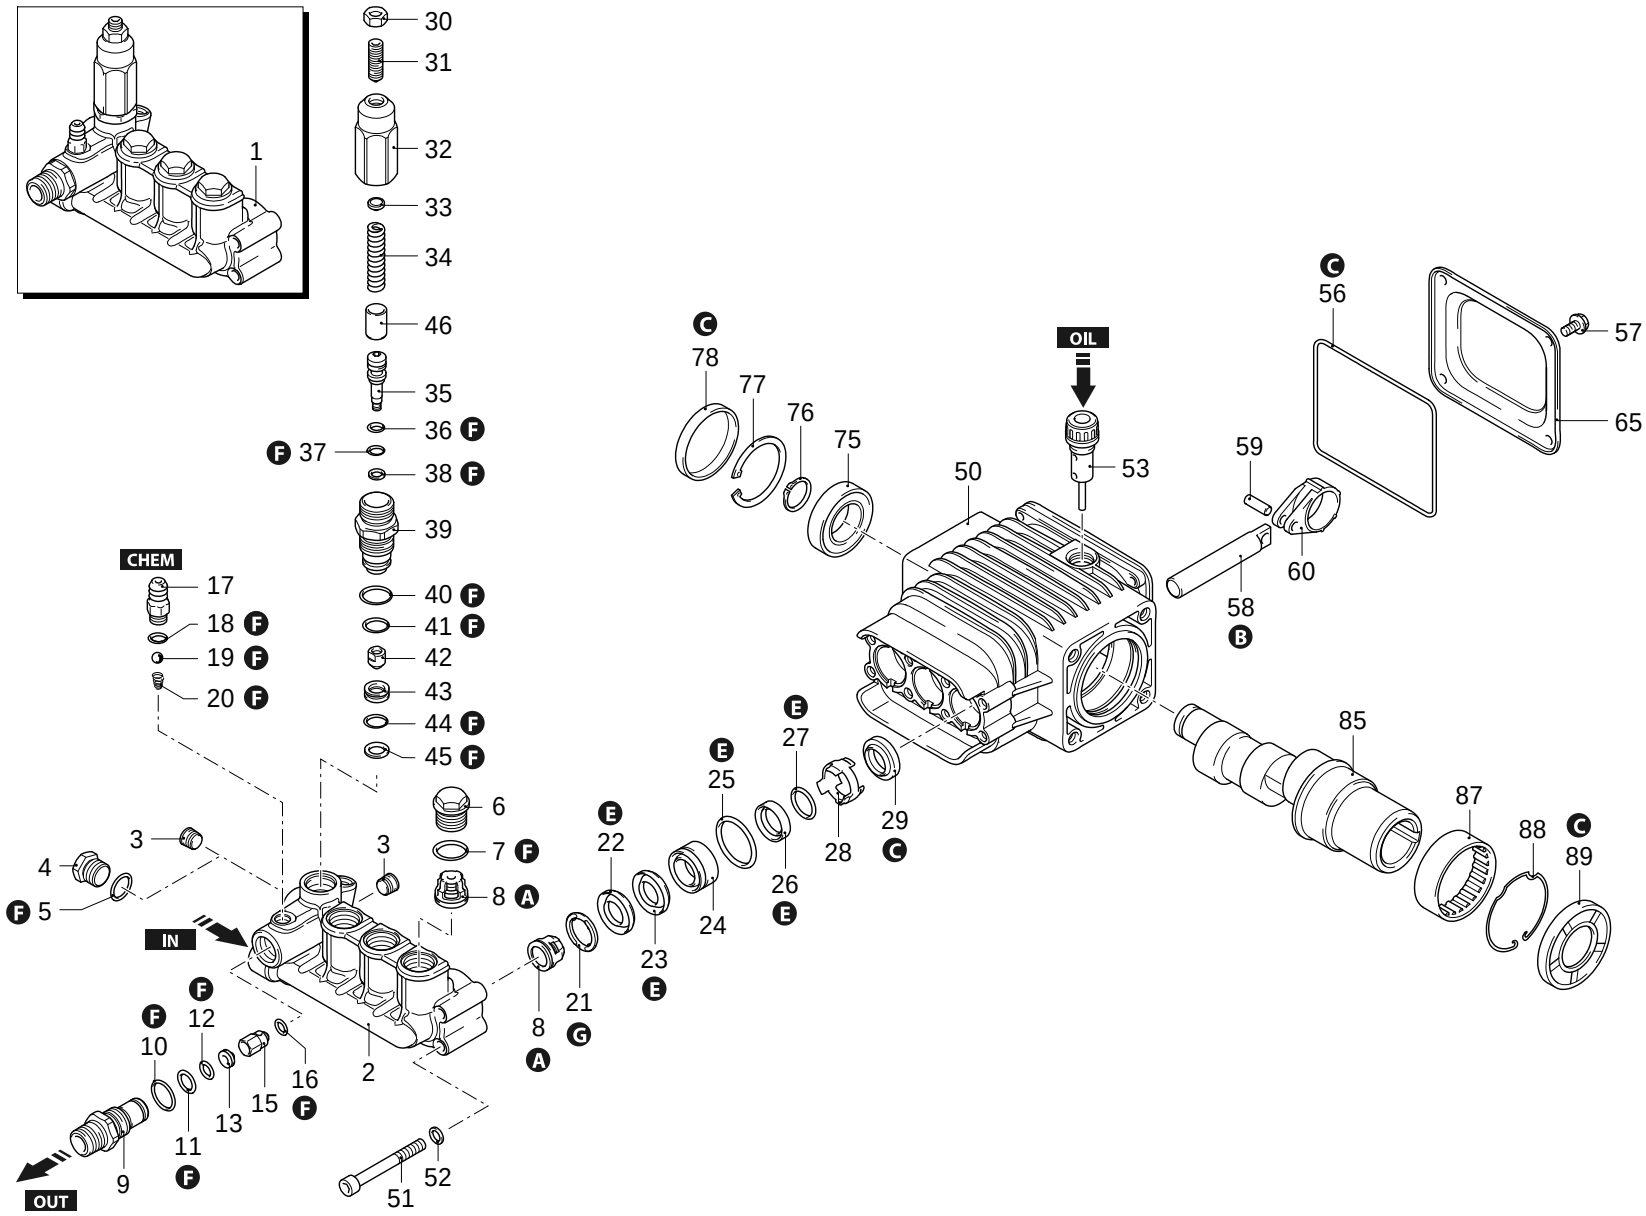

A

B



C



E

F

G

AR-1_000008_v01

29/11/2021

Series 276

RSV D 3400rpm ø 1"

P	Code	Description		Q	Note	Validity
1	2769242	Head assembly	Ø 15	1		
2	2760330	Head	brass	1		
3	2760260	Plug	1/4" G	2	Screw with Loxeal 55-14	
4	880581	Plug	1/4" G brass	1	Screw with Loxeal 55-14 / C=15Nm	
5	820510	O-ring	Ø 10,82x1,78	1		
6	2761450	Plug		3	Screw with Loxeal 55-14 / C=50Nm	
7	1200690	O-ring	Ø 15,6x1,78	3	Lubricate with grease Molykote PG54	
8	2769054	Complete valve		6		
9	2760230	Fitting	3/8" G (M)	1	Screw with Loxeal 55-14 / C=40Nm	
10	394280	O-ring	Ø 12,42x1,78	1	Lubricate with grease Molykote PG54	
11	2760270	O-ring	Ø 12x1	1	Lubricate with grease Molykote PG54	
12	1470210	O-ring	Ø 9x1	1		
13	2760120	Injector	Ø 2,0	1		
15	2760130	Shutter		1		
16	2101770	O-ring	Ø 4x2,5	1	90 Sh	
17	1982520	Hose tail	Ø 8	1	Screw with Loxeal 55-14 / C=4Nm	
18	480480	O-ring	Ø 4,48x1,78	1		
19	1250280	Ball		1		
20	1560520	Spring		1		
21	2760220	Ring	support Ø 15	3		
22	1342761	Water seal	Ø 15	3	Lubricate with grease Molykote PG54	
23	1981580	Ring	anti-extrusion	3		
24	1981570	Piston guide	Ø 15	3	Screw with Loxeal 55-14 / C=35Nm	
25	770260	O-ring	Ø 23,52x1,78	3		
26	1260440	Water seal	Ø 15	3	Lubricate with grease Molykote PG54	
27	640070	O-ring	Ø 13,95x2,62	3		
28	2760310	Spacer		3		
29	1260460	Oil seal		3		
30	1060120	Nut	M6	1		
31	392840	Screw	M6x16	1		
32	2760480	Insert		1		
33	1980220	Plate		1		
34	2760410	Spring		1	Lubricate with grease Molykote BR2 PLUS	
35	2760400	Piston		1		
36	2260100	O-ring	Ø 6,02x2,62	1	Lubricate with grease Molykote PG54	
37	660190	O-ring	Ø 6,07x1,78	1	Lubricate with grease Molykote PG54	
38	2760210	Ring	anti-extrusion	1		
39	2760960	Piston guide		1	Screw with Loxeal 55-14 / C=35Nm	

P	Code	Description		Q	Note	Validity
40	1200690	O-ring	Ø 15,6x1,78	1	Lubricate with grease Molykote PG54	
41	394280	O-ring	Ø 12,42x1,78	1	Lubricate with grease Molykote PG54	
42	2260070	Shutter		1	Screw with Loxeal 55-14 / C=3Nm	
43	2760980	Seat		1		
44	770140	O-ring	Ø 11,11x1,78	1	Lubricate with grease Molykote PG54	
45	2760640	Ring	anti-extrusion	1		
46	2760970	Bushing		1		
50	2760010	Pump body		1		
51	801080	Screw	TCEI M6x50	8	C=10,4Nm	
52	1381550	Washer		8		
53	880130	Plug		1		
56	2760281	O-ring		1		
57	802190	Screw	TE 6x12	4	C=8Nm	
58	2760040	Piston	Ø 15	3	Lubricate with grease Molykote PG54	
59	1780050	Pin		3		
60	1780710	Connecting-rod	bronze	3		
65	2760110	Cover		1		
75	1780490	Bearing		1		
76	1780550	Ring	seeger Øe 20	1		
77	1260790	Ring	seeger Øi 52	1		
78	1266740	Cover		1		
85	1780920	Shaft	8 marked	1		
87	1321190	Bearing		1	Assemble with tool [1780610]	
88	1321080	Ring		1		
89	480671	Ring	seal	1	Assemble with tool [1781000]	
A	42666	Valve kit		1		
B	2187	Piston kit	Ø 15	1		
C	2188	Oil seal kit		1		
E	2189	Water seal kit	Ø 15	1		
F	2190	Gasket kit		1		
G	2191	Support ring kit	Ø 15	1		

Revision: 1

Date: 29/11/2021

Oil type: SAE 15W40

Oil quantity: O,300 Kg

Attachment:

C=Tightening torque (Tolerance +0 ÷ -10%)

P	Code	Description		Q	Note	Validity
1	2760290	Flange	F40	1		
2	180030	Screw	TCEI M8x20	4	Screw with Loxeal 55-14 / C=24,5Nm	
3	820440	Screw	M6x6	1		



F40

AR-1_000073_v01

Revision: 1
Date: 29/11/2021

Oil type: SAE 15W40
Oil quantity: O,300 Kg

Attachment:

C=Tightening torque (Tolerance +0 ÷ -10%)